

Blighter® AUDS® (Anti UAV Defence System)



Blighter AUDS (shown with Blighter A422 radar with W20S antennas)

Blighter AUDS (Anti-UAV Defence System) is designed to disrupt and neutralise Unmanned Aerial Vehicles (UAVs) engaged in hostile airborne surveillance and potentially malicious activity.

The Blighter AUDS system combines electronic-scanning radar target detection, electro-optical (EO) tracking/classification and directional RF inhibition capability.



Blighter AUDS is a smart-sensor and effector package capable of remotely detecting small UAVs and then tracking and classifying them before providing the option to disrupt their activity. The system may be used in remote or urban areas to prevent UAVs being used for terrorist attacks, espionage or other malicious activities against sites with critical infrastructure.

AUDS Team

The AUDS team brings together three leading British companies, each with the unique capabilities required to create an effective counter UAV system.

Blighter's A400 series air security radars are able to **DETECT** small UAVs in all weather conditions, 24 hours a day flying in urban areas or near to the horizon. The Chess Dynamics Hawkeye Deployable System (DS) and EO Video Tracker, featuring both a long range colour camera and a high sensitivity Thermal Imager (TI), along with state-of-the-art video tracking technology, is able to **TRACK** the UAV and, combined with radar target information, classify the target. The operator is then able to make a timely and informed decision to use the Enterprise Control Systems ('ECS'), smart RF inhibitor to selectively interfere with the C2 channels on the UAV allowing the system to **DISRUPT** the UAV's mission. The smart RF inhibitor uses directional antennas to achieve maximum range of operation with minimum collateral effect

Specification

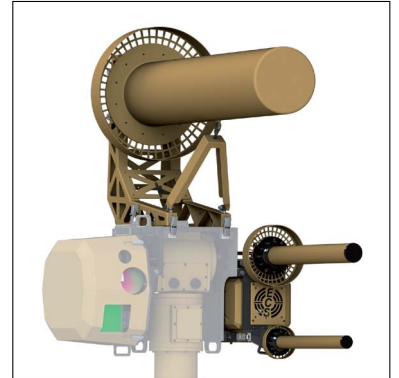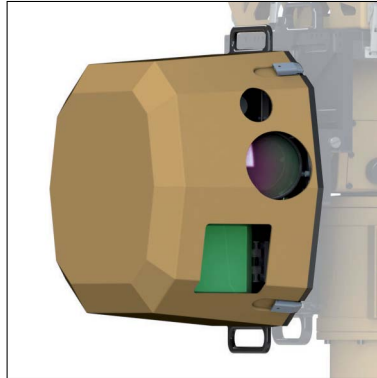

Bligher[®] Surveillance Systems

Bligher A400 Series Air Security Radar

- Detection range: 10 km
- Minimum target size (RCS): 0.01 m²
- Frequency band: Ku-band
- Radar type: E-scan
Frequency Modulated
Continuous Wave (FMCW)
Doppler Surveillance Radar
- Power output: 4 Watt
- Azimuth coverage: 180°
(standard) or 360° (optional)
- Elevation coverage: 10°
(M10S antennas) or 20°
(W20S antennas)
- Elevation adjustment: -40° to
+30° using optional Bligher
Radar Tilting System (BRTS)

CHES DYNAMICS

Hawkeye DS and EO Video Tracker

- Viper Dynamic Positioner:
 - Azimuth: Continuous
 - Elevation: -50° to +60°
 - Max speed: 60° per second
- Piranha 46 HR Camera:
 - Type: Colour HD 2.3 MP
 - Optical zoom: x30
 - Digital zoom: x12
 - Focus: Auto
- Thermal Camera:
 - Type: Gen 3 Cooled
 - Resolution: 640 x 512 pixel
 - Wavelength: 3 to 5 μm
 - Zoom: 24° to 1.8° FOV
- EO Video Tracker:
 - Type: Vision4ce digital video
tracker and detector
- Optical Disruptor (Option):
 - Type: 1.4° high intensity
beam

Enterprise Control Systems Ltd

Directional RF Inhibitor

- High gain quad-band antenna
system (penta-band 5.8 GHz
option)
- Disruption/inhibition delivers
operational effect
- Custom inhibition waveforms
specific to the threat
- Includes GNSS frequencies
- Software defined intelligent RF
inhibition
- Optimised disruption profiles
- RF output power: Details
available upon request

BSS-1403 ©2016 Bligher Surveillance Systems Ltd

Errors and omissions excepted. Bligher Surveillance Systems Ltd reserves the right to modify specifications without notice. Bligher radars are protected by a number of international patents. The Bligher Anti UAV Defence System (AUDS) is patent pending. Purchase of this equipment is subject to export licence approval. The Bligher name is an international registered trademark. The AUDS name is a registered trademark

Bligher Surveillance Systems Ltd
Iceni House
London Road
Great Chesterford
Saffron Walden
CB10 1NY
United Kingdom
www.bligher.com
sales@bligher.com

Tel: +44 1223 491122
Fax: +44 1223 491123